

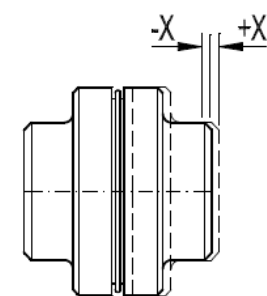


ACOPLAMENTO FLEXÍVEL ELÁSTICO – SÉRIE NORMEX


D	D1	Ø máx	L	L1	L2	Torque kgf·m	rpm máx.	J Kg·m ²	Peso total	Desalinhamento		
										Axial ± X	Radial Y	Angular α°
50	33	22	52	26	2,0 ± 0,5	2,3	12500	0,0002	0,45	0,5	0,5	1,5
67	46	30	62,5	31	2,5 ± 0,5	4,0	10000	0,0004	0,93	0,5	0,5	1,5
82	57	38	83	41	3,0 ± 1,0	9,0	8000	0,0012	1,80	1,0	0,5	1,5
97	68	45	103	51	3,0 ± 1,0	18,9	7000	0,0028	3,50	1,0	0,5	1,5
112	79	50	123,5	61	3,5 ± 1,0	30,0	6000	0,0052	5,00	1,0	0,5	1,2
128	90	60	143,5	71	3,5 ± 1,0	48,2	5000	0,0112	7,90	1,0	0,6	1,2
148	107	70	163,5	81	3,5 ± 1,0	75,0	4500	0,0190	12,3	1,0	0,6	1,2
168	124	80	183,5	91	3,5 ± 1,5	125	4000	0,0460	18,4	1,5	0,6	1,2
194	140	90	203,5	101	3,5 ± 1,5	200	3500	0,0950	26,3	1,5	0,7	1,2

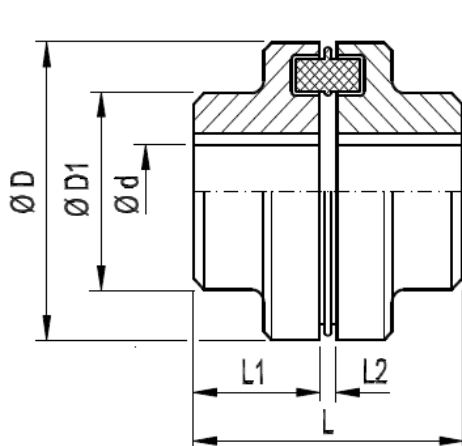

Desalinhamento axial



Desalinhamento radial

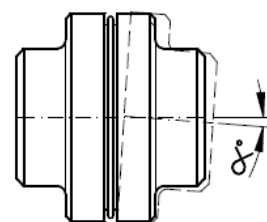

Desalinhamento angular